

6MD8

Medium-Mu Triple Triode

NOVAR TYPE

For Matrix-Amplifier Applications in Color-TV Receivers

ELECTRICAL

Heater Characteristics and Ratings

Voltage (AC or DC)	6.3 ± 0.6	V
Current at 6.3 V	0.900	A
Maximum heater-cathode voltage (Each unit):		
Heater negative with respect to cathode:		
Peak	200	V
Heater positive with respect to cathode:		
Peak	200	V
DC Component	100	V

Direct Interelectrode Capacitances (Approx.)^a

	Unit No. 1	Unit No. 2	Unit No. 3	
Grid to plate.	3.0	3.0	3.0	pF
Input: G to (K, H)	3.6	3.6	3.4	pF
Output: P to (K, H).	0.48	0.48	0.36	pF

MECHANICAL


Operating Position	Any
Type of Cathode.	Coated Unipotential
Maximum Overall Length	2.960 in
Maximum Seated Length.	2.580 in
Length, Base Seat to Bulb Top	
(Excluding tip)	2.060 to 2.240 in
Diameter	1.062 to 1.188 in
Bulb	T9

Bases (Alternates)

- Small-Button Novar 9-Pin (JEDEC No.E9-75)
- Small-Button Novar 9-Pin with Exhaust Tip 9-Pin (JEDEC No.E9-89)

Basing Designation for BOTTOM VIEW 9RQ

- Pin 1-Plate of Unit No.3
- Pin 2-Plate of Unit No.2
- Pin 3-Plate of Unit No.1
- Pin 4-Heater
- Pin 5-Heater
- Pin 6-Grid of Unit No.1
- Pin 7-Cathode
- Pin 8-Grid of Unit No.2
- Pin 9-Grid of Unit No.3



CHARACTERISTICS, CLASS A₁ AMPLIFIER

Values are for Each Unit

Plate Voltage.	250	V
Grid Voltage	-10.5	V
Amplification Factor	17	
Plate Resistance (Approx.)	5500	Ω
Transconductance	3100	μmho



RADIO CORPORATION OF AMERICA
Electronic Components and Devices

Harrison, N. J.

DATA I
9-65

6MD8

Plate Current.	11.5	mA
Plate Current for grid volts = -14	4	mA
Grid Voltage (Approx.) for plate μ A = 50.	-23	V

AMPLIFIER — CLASS A₁

Values are for Each Unit

Maximum Ratings, Design-Maximum Values


Plate Voltage.	330	V
Grid Voltage		
Positive-bias value.	0	V
Plate Dissipation.	3	W

MAXIMUM CIRCUIT VALUE

Grid-Circuit Resistance		
For fixed-bias operation	1	M Ω

^a Without external shield.

DIMENSIONAL OUTLINE

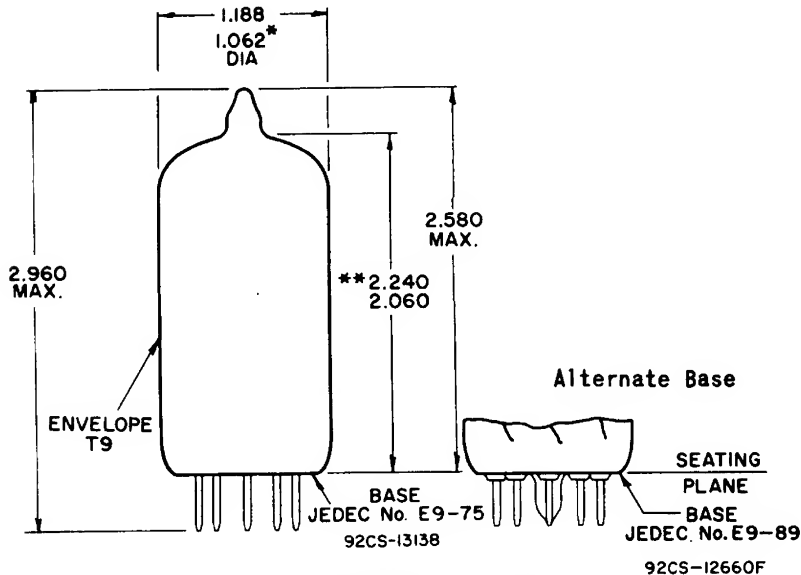

DIMENSIONS IN INCHES

Bottom-exhaust version has the same dimensions for maximum over-all length and seated length as the top-exhaust outline shown.


* Applies to the minimum diameter except in the area of the seal.

** Measured from the base seat to bulb-top line as determined by arcing gauge of 0.600" I.D.



6MD8

Average Plate Characteristics EACH UNIT

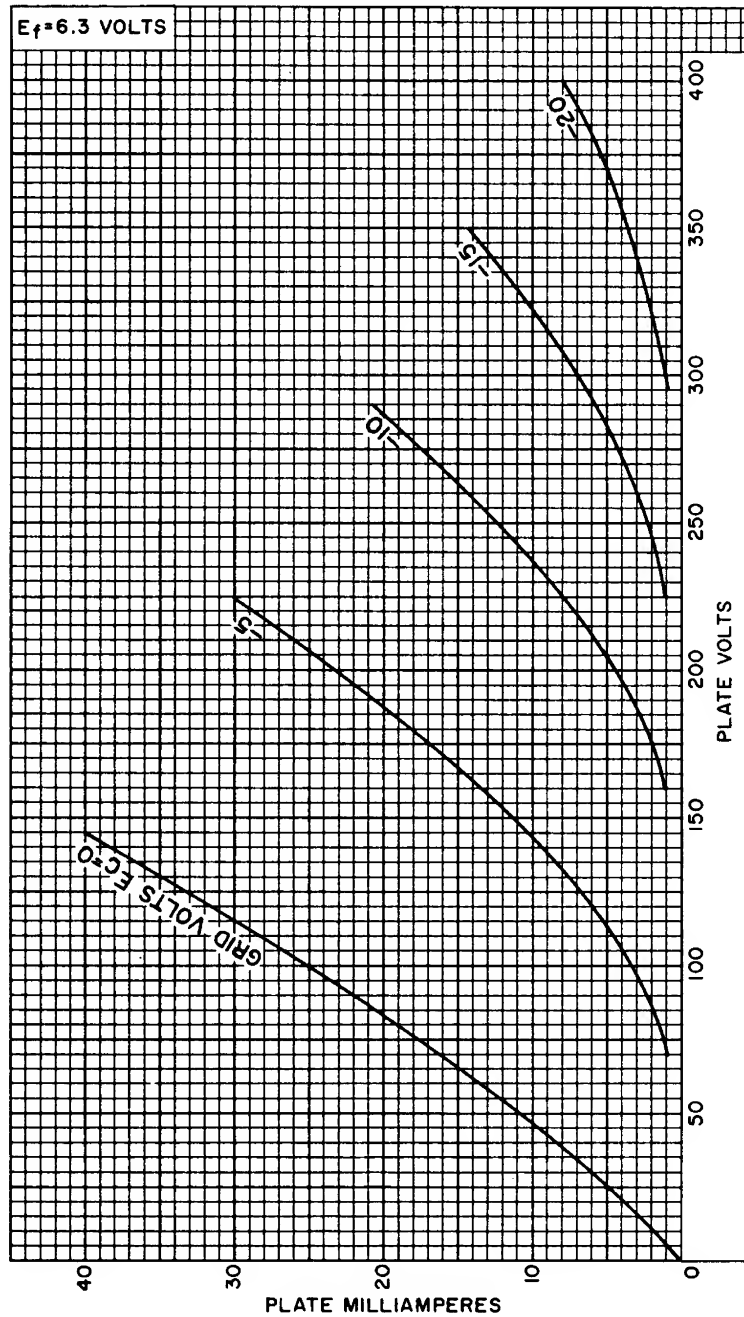

92CM-11966



RADIO CORPORATION OF AMERICA
Electronic Components and Devices Harrison, N. J.

DATA 2
9-65